

**POPET CHECK VALVE**  
**1/8" - 1/2" Dual Ferrule Tube,**  
**Female & Male NPT, 1/4" Face Seal**  
**0-3000 PSIG**

PCV  
 SERIES

**Description**

Poppet type, zero leak, inline check valve for liquid and gas applications to 3000 Psig. Fully retained O-ring seal design permits full rated pressure in the checked direction. Offered with fully interchangeable dual ferrule tube or metal to metal face seal connections. A variety of crack pressures and seal materials, combined with a metal to metal positive stop provides long trouble free service life in the most demanding applications.

**Features**

- Working Pressures to 3000 Psig (206 bar)
- Fully Back Pressure Rating
- Fully Retained O-ring Seal
- Dual Ferrule Tube, Female NPT, Male NPT and Face Seal Connections
- Cracking Pressures from 0.3 to 25 Psig (0.02-1.7 bar)
- 100% Factory tested for crack, leakage and reseal performance

**Technical Data**

- Nominal Crack Pressures: 0.3, 1, 10, & 25 Psig (0.02, 0.07, 0.7, & 1.7 bar)
- Maximum Pressure: 3000 Psig @ 70°F (206 bar @ 21° C)
- Temperature Rating:  
 -80°F to 375°F (-62°C to 190°C)  
 (based on seal selection, see ordering information)

**Materials of Construction**


Component	Valve Body Material	
	Brass	Stainless Steel
Inlet Cap, Outlet Body, Poppet	Brass, ASTM B16	316 SS, ASTM A479 <sup>1</sup>
O-ring Retainer	316 SS, ASTM A479	
Spring	302 SS, ASTM A313	
O'Ring Seal <sup>2</sup>	Buna-N	Viton™

1 PTFE dry lubricant applied to threads

2 Lubricated with Krytox™ GPL-202



# SERIES PCV POPPET CHECK VALVE

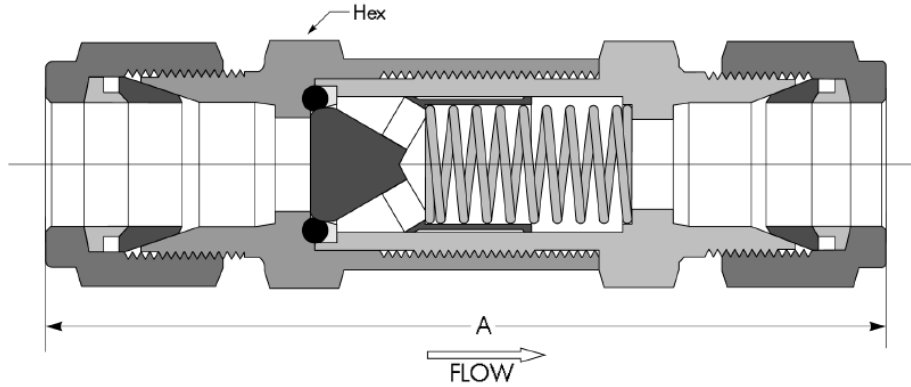

## Dimensional/Flow Data

Model Code	Port Configuration		Dimensions/Flow			
	Inlet	Outlet	A <sup>1</sup> (inches)	Hex	Cv	
PCV-2T	1/8" Tube	1/8" Tube	2.19	5/8"	0.10	
PCV-2P	1/8" Male NPT	1/8" Male NPT	1.71			
PCV-2F	1/8" Female NPT	1/8" Female NPT	1.89			
PCV-4VS <sup>2</sup>	1/4" Face Seal	1/4" Face Seal	2.21		3/4"	0.47
PCV-4T	1/4" Tube	1/4" Tube	2.35			
PCV-4P	1/4" Male NPT	1/4" Male NPT	2.09			
PCV-4PT	1/4" Male NPT	1/4" Tube	2.22			
PCV-4F	1/4" Female NPT	1/4" Female NPT	2.15	7/8"	1.47	
PCV-6T	3/8" Tube	3/8" Tube	3.17			
PCV-6P	3/8" Male NPT	3/8" Male NPT	2.78			
PCV-6F	3/8" Female NPT	3/8" Female NPT	2.98			
PCV-8T	1/2" Tube	1/2" Tube	3.42			1-1/16"
PCV-8P	1/2" Male NPT	1/2" Male NPT	3.16			
PCV-8F	1/2" Female NPT	1/2" Female NPT	3.58			

<sup>1</sup> Dimensions are shown with nuts finger-tight.

<sup>2</sup> 316 SS only

Flow tested in accordance with ISA S75.21 with air. Restrictions in the inlet or outlet piping may reduce flow. Other Inlet and Outlet combinations available. Consult Factory.

## Ordering Information

PCV - 4T SS - V - 1

### SERIES

PCV - Poppet Check Valve

### PORT CONFIGURATION

- 2T - 1/8" Tube x 1/8" Tube
- 2P - 1/8" Male NPT x 1/8" Male NPT
- 2F - 1/8" Female NPT x 1/8" Female NPT
- 4VS - 1/4" Face Seal x 1/4" Face Seal
- 4T - 1/4" Tube x 1/4" Tube
- 4P - 1/4" Male NPT x 1/4" Male NPT
- 4PT - 1/4" Male NPT x 1/4" Tube
- 4F - 1/4" Female NPT x 1/4" Female NPT
- 6T - 3/8" Tube x 3/8" Tube
- 6P - 3/8" Male NPT x 3/8" Male NPT
- 6F - 3/8" Female NPT x 3/8" Female NPT
- 8T - 1/2" Tube x 1/2" Tube
- 8F - 1/2" Male NPT x 1/2" Male NPT

### MATERIAL CODE

- B - Brass
- SS - 316 SS

### CRACK PRESSURE

- .3 - (.1 - .4 Psig) (0.02 bar)
- 1 - (.5 - 1 Psig) (0.07 bar)
- 10 - (8 - 12 Psig) (0.7 bar)
- 25 - (22 - 27 Psig) (1.7 bar)

### SEAL MATERIAL

- V - Viton™, -10°F to 375°F (-23°C to 190°C)
- B - Buna-N, -40°F to 250°F (-40°C to 121°C)
- N - Neoprene, -40°F to 300°F (-40°C to 148°C)
- EP - Ethylene Propylene, -65°F to 300°F (-54°C to 148°C)
- FS - Fluorosilicone, -80°F to 350°F (-62°C to 176°C)
- S - Silicone, -70°F to 450°F (-56°C to 232°C)
- T - TFE, -50°F to 350°F (-46°C to 176°C)

TFE Seal may require back pressure to seal leak-tite

### OPTIONS

Oxygen cleaning, alternative seals and other thread configurations, consult factory

Note: Viton™ and Krytox™ are trademarks of DuPont.

PROPER COMPONENT SELECTION – When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.



[www.generant.com](http://www.generant.com)

1865 Route 23 South PO Box 768 Butler, New Jersey 07405 973.838.6500 Fax 973.838.4888