



OPTIONAL MANUAL
OVERRIDE SHAFT
.300 ACROSS FLATS


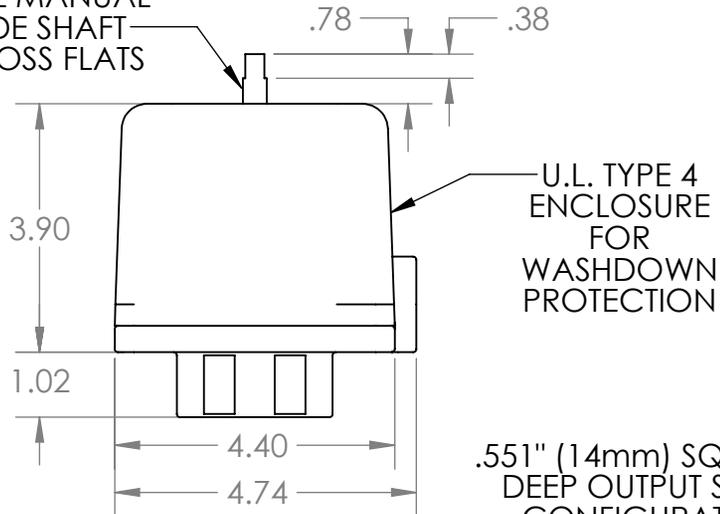


SCALE 0.25

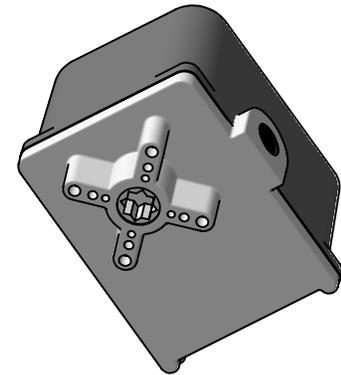

CUSTOM COLORS AVAILABLE

.551" (14mm) SQUARE FEMALE X .62"
DEEP OUTPUT STANDARD. OTHER
CONFIGURATIONS AVAILABLE
INCLUDING SQUARE, DOUBLE "D" &
CUSTOM

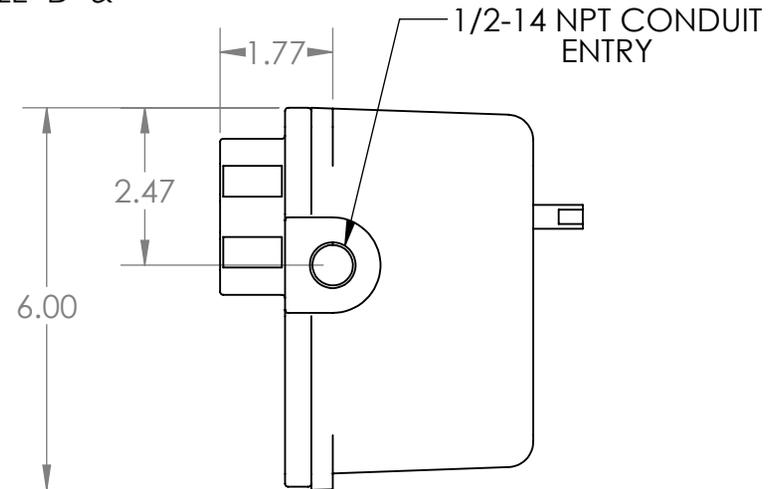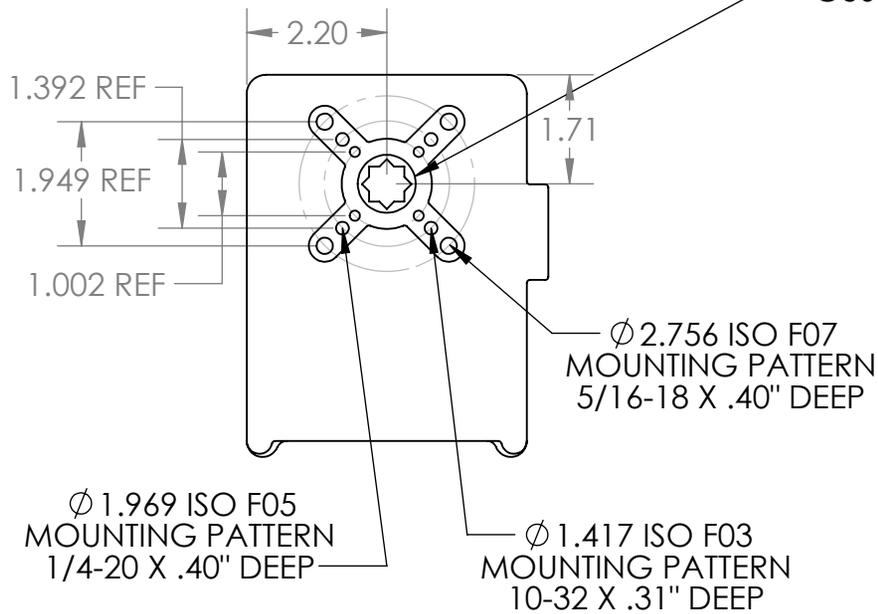

REX ENGINEERING


RA-FEMALE

SCALE: 1:3

ENGLISH UNITS


SHEET 1 OF 1

OPTIONAL MANUAL
OVERRIDE SHAFT
.300 ACROSS FLATS


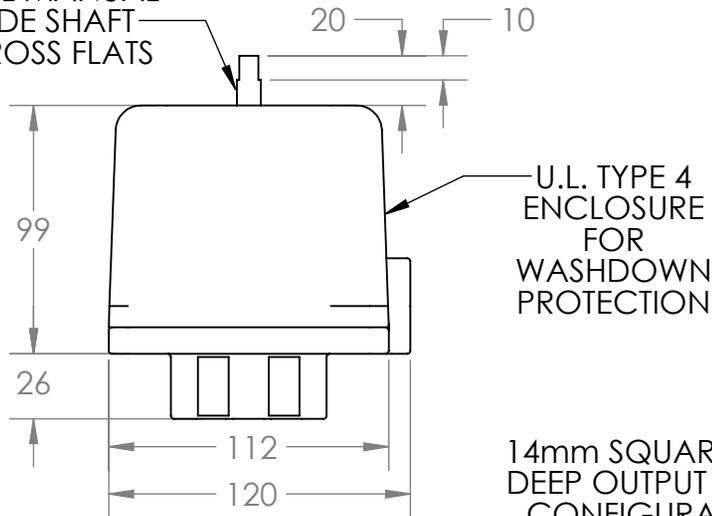


14mm SQUARE FEMALE X 16mm"
DEEP OUTPUT STANDARD. OTHER
CONFIGURATIONS AVAILABLE
INCLUDING SQUARE, DOUBLE "D" &
CUSTOM

SCALE 0.25

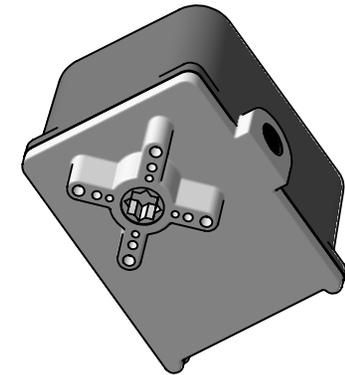

CUSTOM COLORS AVAILABLE

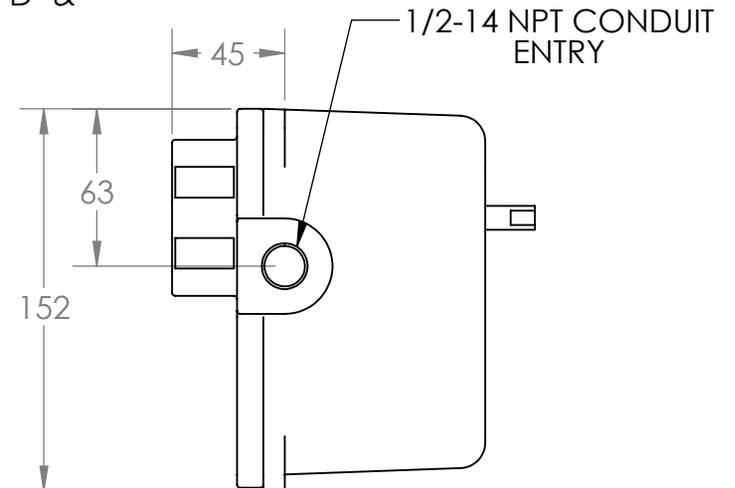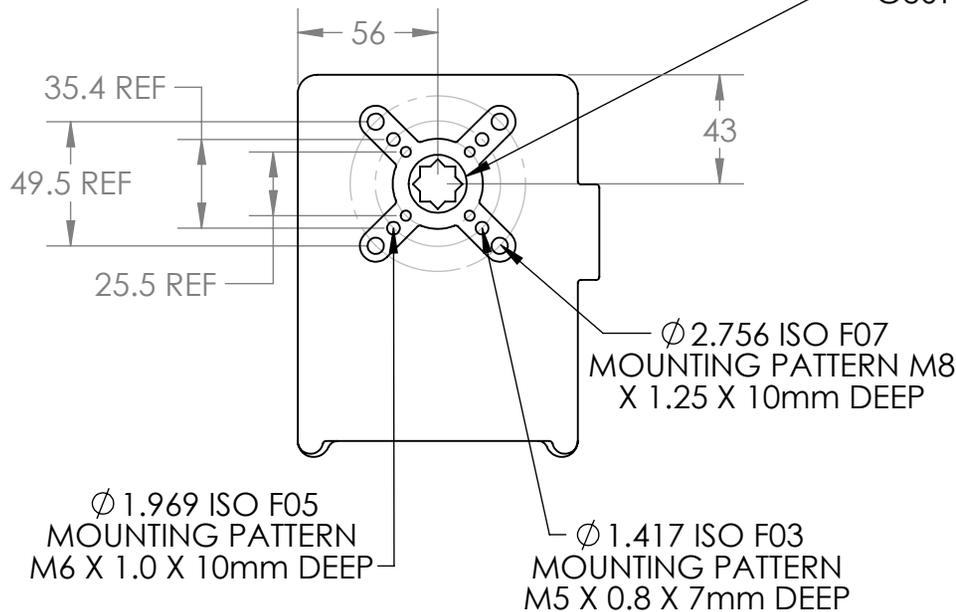

REX ENGINEERING


RA-FEMALE

SCALE: 1:3


METRIC UNITS

SHEET 1 OF 1



OPTIONAL MANUAL
OVERRIDE SHAFT
.300 ACROSS FLATS

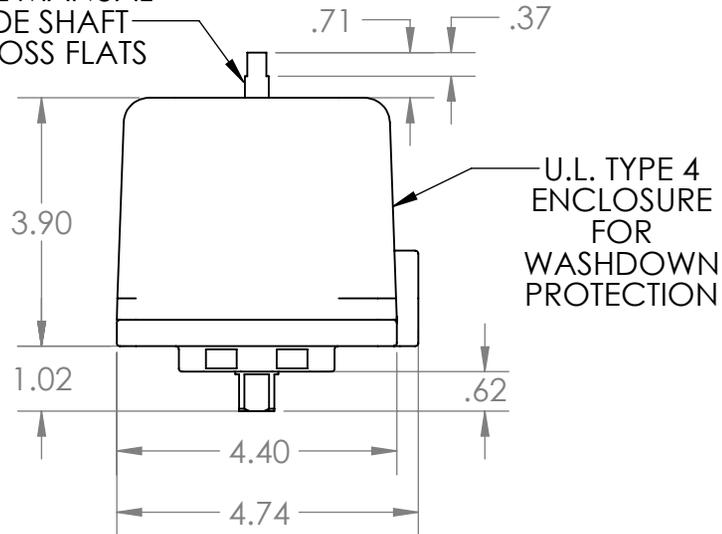

SCALE 0.25

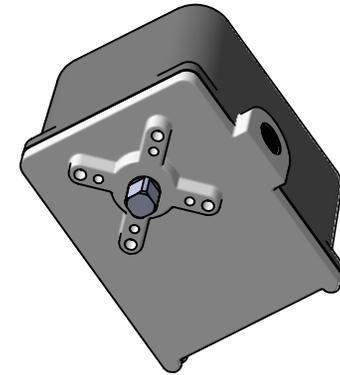

CUSTOM COLORS AVAILABLE

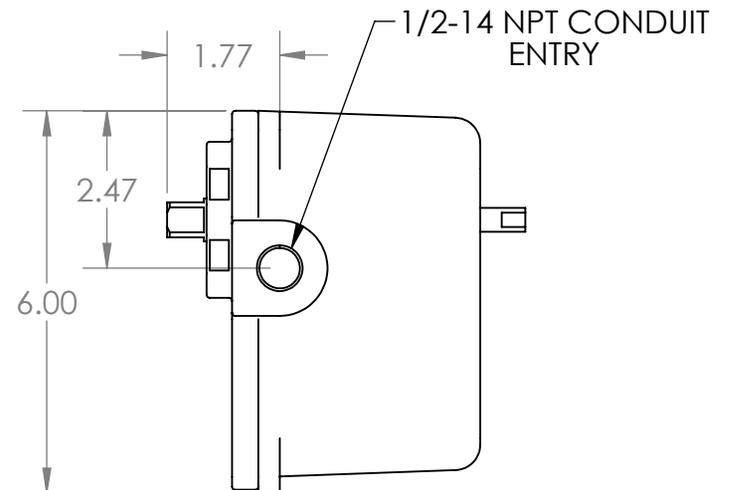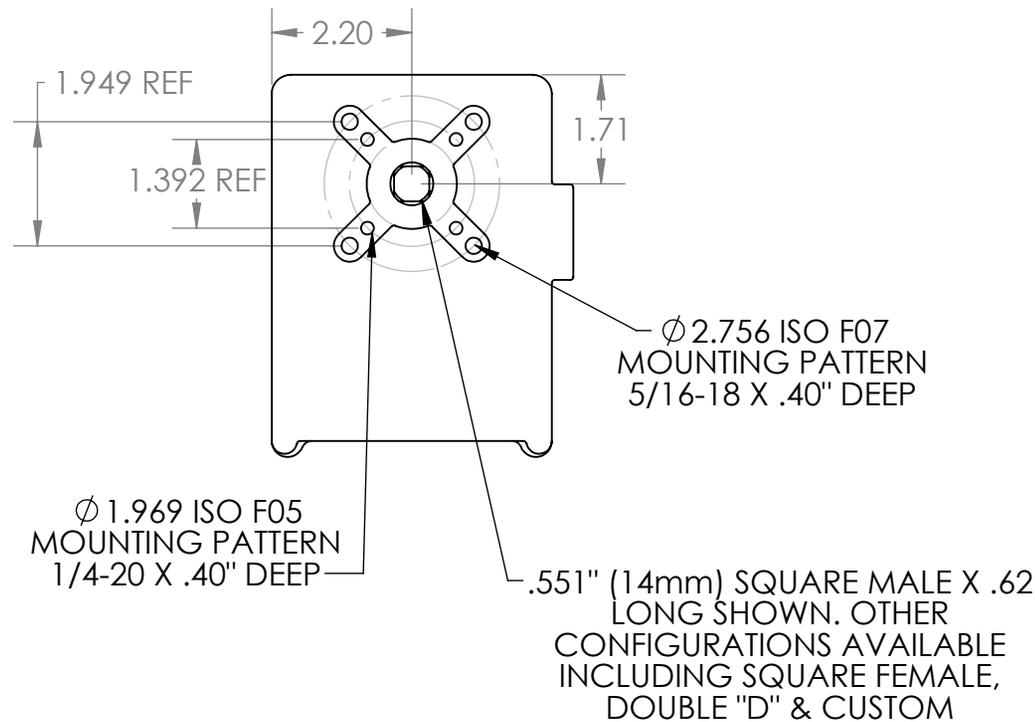

REX ENGINEERING


RA-MALE

SCALE: 1:3


ENGLISH UNITS

SHEET 1 OF 1



OPTIONAL MANUAL
OVERRIDE SHAFT
.300 ACROSS FLATS

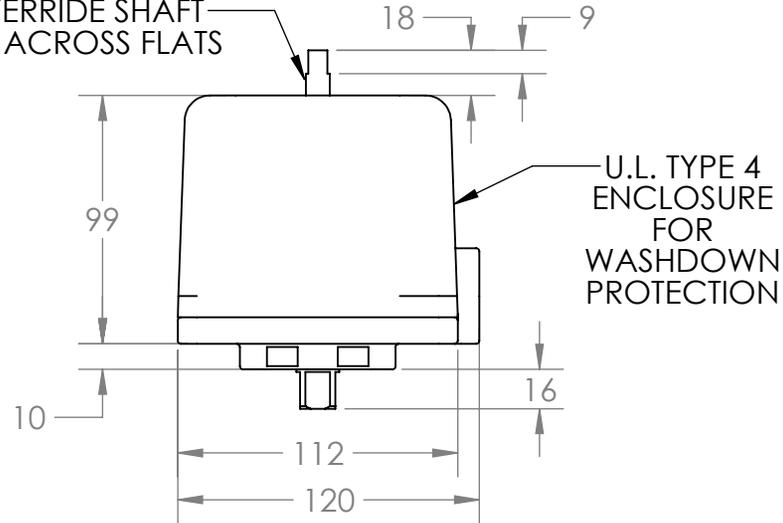

SCALE 0.25

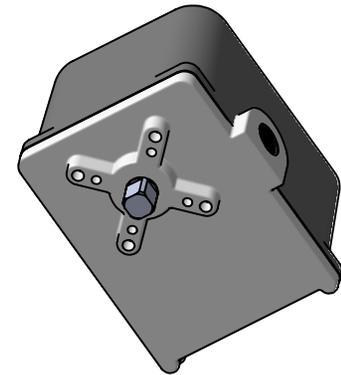

CUSTOM COLORS AVAILABLE

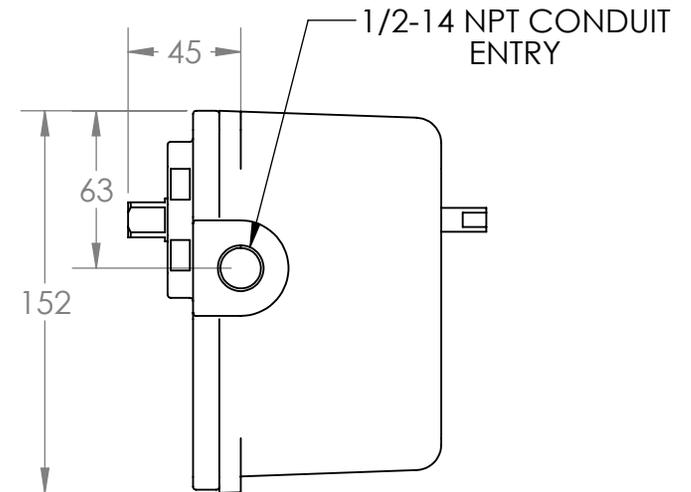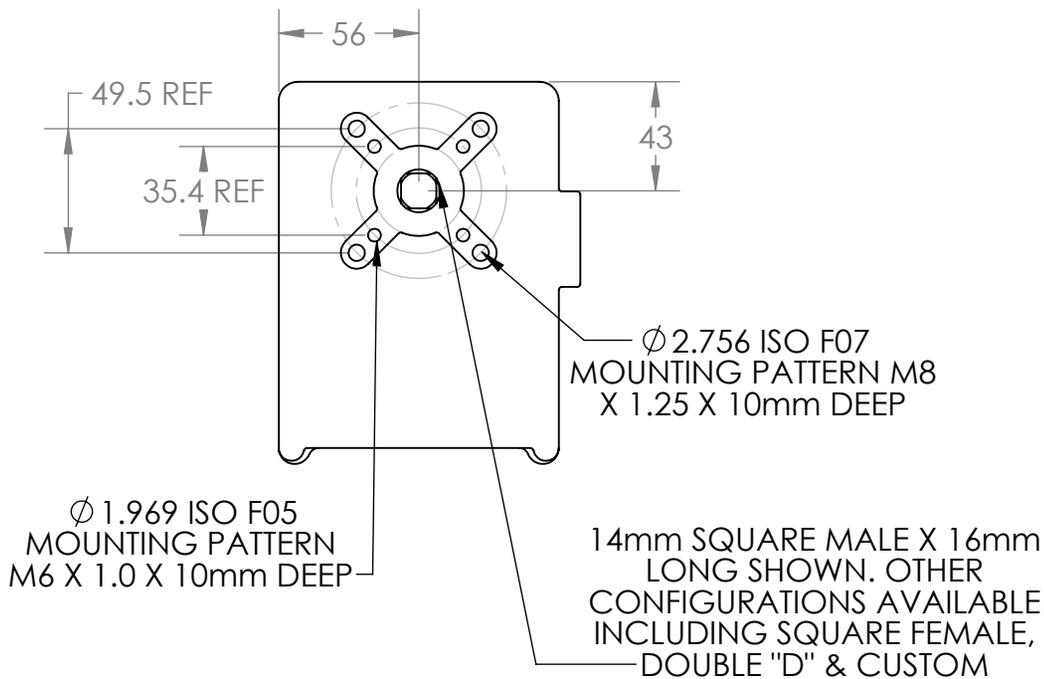



REX ENGINEERING

RA-MALE

SCALE: 1:3

METRIC UNITS

SHEET 1 OF 1

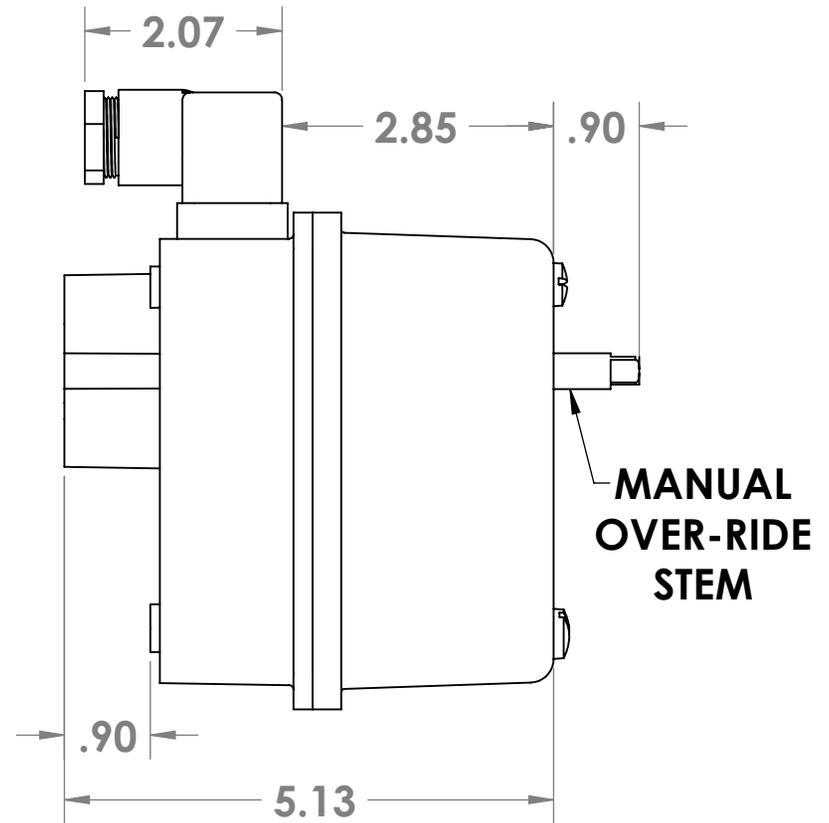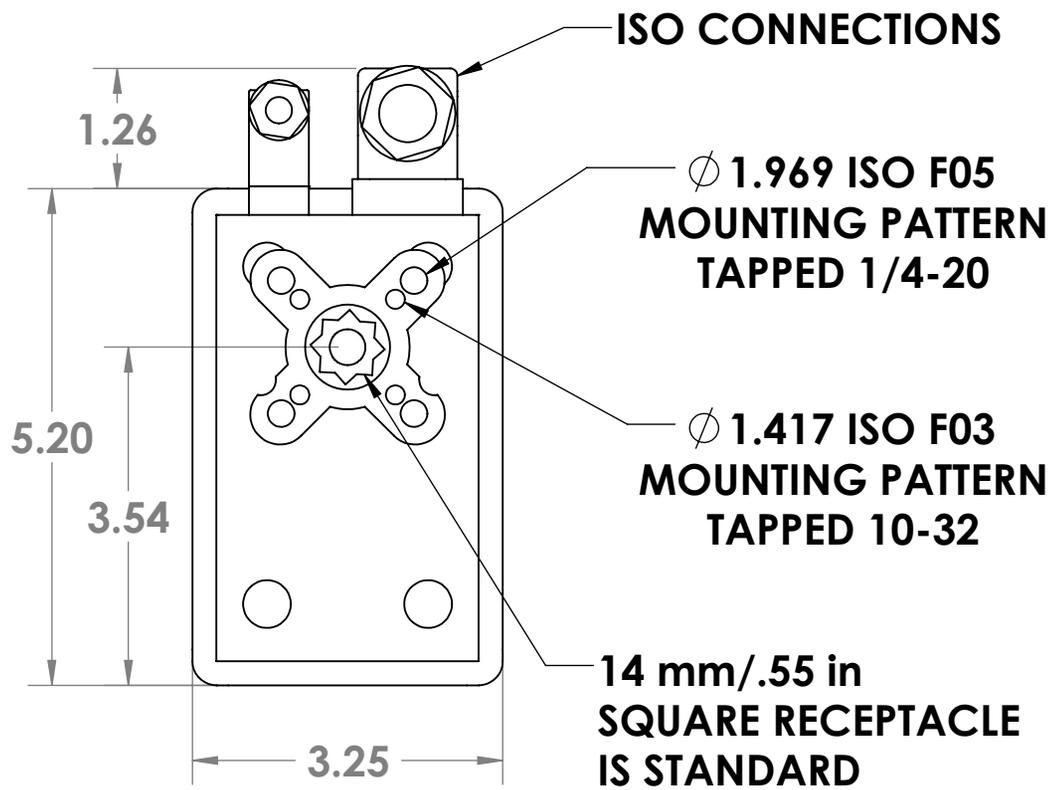


SRA COMPACT VALVE ACTUATOR


- 24/120/240 VAC, 12/24 VDC
- 150 IN. LB. OF TORQUE
- 90°, 180° & CUSTOM SPANS AVAILABLE
- QUARTER TURN SPEEDS FROM 1.5 SECONDS TO 15 SECONDS
- BRUSHLESS DC ALSO AVAILABLE
- WASHDOWN PROTECTION

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	REX ENGINEERING	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.02 THREE PLACE DECIMAL ±.005		DRAWN	RPH 4/18		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		SIZE DWG. NO. REV	
MATERIAL		ENG APPR.			
FINISH		MFG APPR.		SCALE: 1:2 WEIGHT: SHEET 1 OF 1	
DO NOT SCALE DRAWING		Q.A.			
		COMMENTS:			


AC & DC VOLT UNIDIRECTIONAL 44-13000

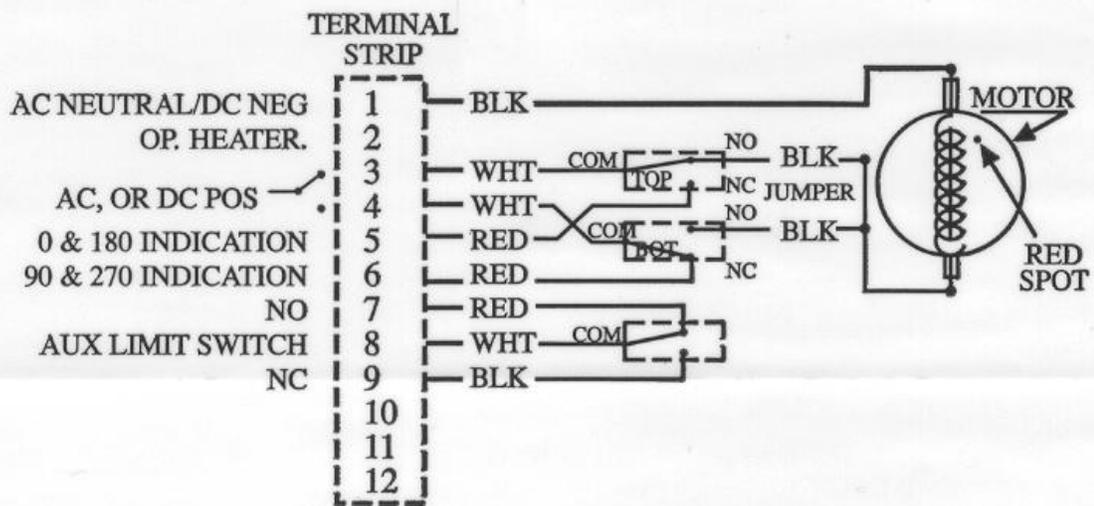


DC REVERSIBLE 300/600

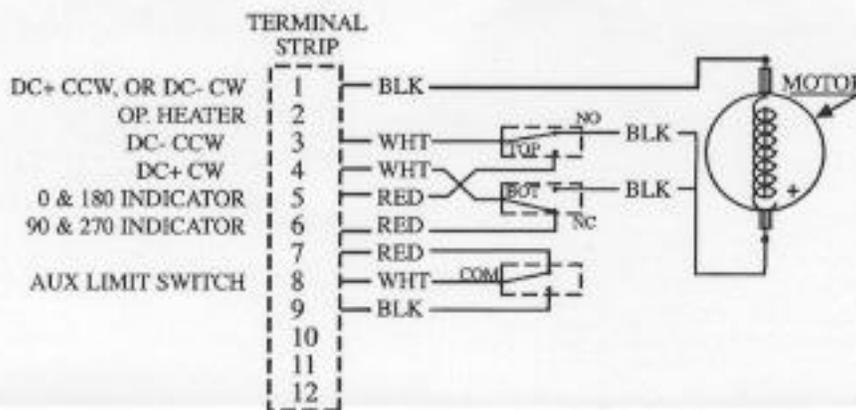

AC REVERSIBLE 150

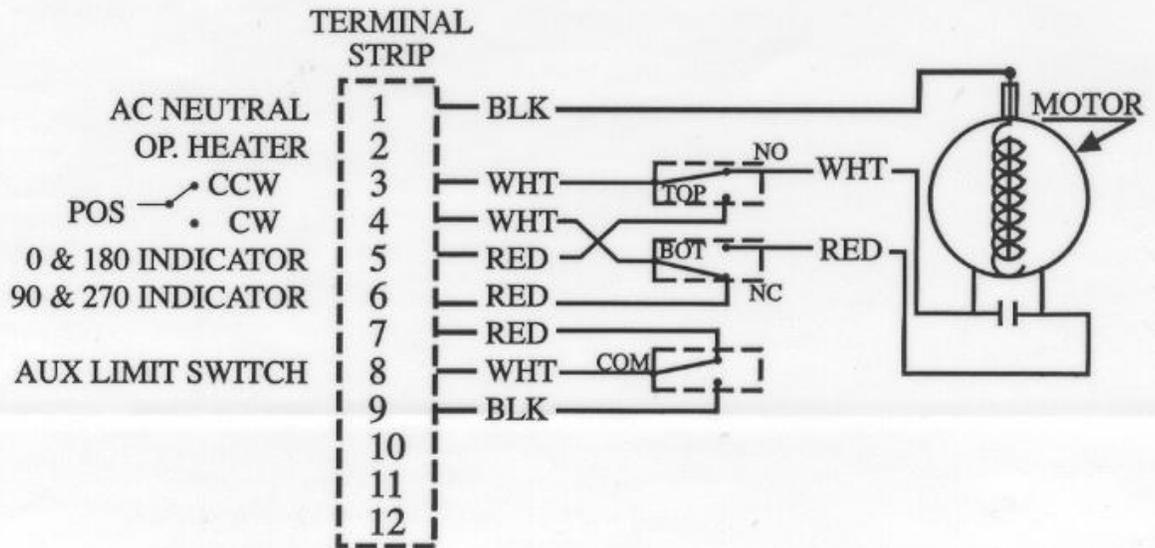

AC REVERSIBLE 300/600 INCH LB.

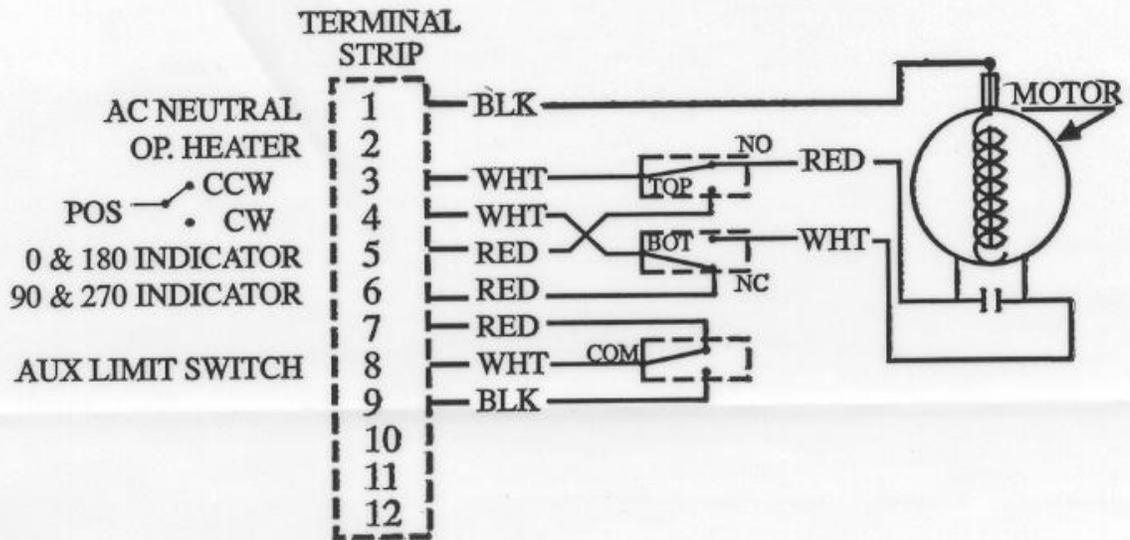

44-13001

Reversible Actuator Data

Torque (In. Lb.)	Voltage	Seconds/90°	Current (A)
150	230 VAC	5	0.37
300	230 VAC	9	0.37
600	230 VAC	16	0.37
150	115 VAC	5	0.87
300	115 VAC	9	0.87
600	115 VAC	16	0.87
150	24 VAC	5	2.6
300	24 VAC	9	2.6
600	24 VAC	16	2.6
300	12 VAC	6	1.5
600	24 VAC	10	1.8
300	12 VAC	6	0.7
600	24 VAC	10	0.9

Unidirectional Actuator Data

Torque (In. Lb.)	Voltage	Seconds/90°	Current (A)
150	230 VAC	5	0.91
300	230 VAC	9	0.91
600	230 VAC	16	0.91
150	115 VAC	5	1.81
300	115 VAC	9	1.81
600	115 VAC	16	1.81
150	24 VAC	5	7.9
300	24 VAC	9	7.9
600	24 VAC	16	7.9
300	12 VAC	6	1.5
600	24 VAC	10	1.8
300	12 VAC	6	0.7
600	24 VAC	10	0.9